

# ***megamount 551*** Truck tire changer

Clamp based truck tyre changer for busses and trucks



## **Electro hydraulic universal tyre changer for tube and tubeless tyres**



That is self-evident for us:

- Double mounting and demounting tool to operate with tube and tubeless tyres
- Right and left hand spin
- 2-speed chuck rotating system
- Clamping range 13-27 inches
- Tyre width maximal 780 mm
- Tyre diameter maximal 1600 mm

For all problems the right solution:



### **CLAMPING DEVICE**

The hydraulic pressure of the rim clamping can be adjusted to avoid any damage of the rim.


### **CONTROL UNIT**

The chuck can be turned with 2 speeds. This allows a flexible and smooth handling of all tyre dimensions. The control unit can be moved to allow an operation in the most suitable position.



### **DOUBLE MOUNTING HEAD**

The double mounting/demounting tool allows an operation with tube and tubeless tyres

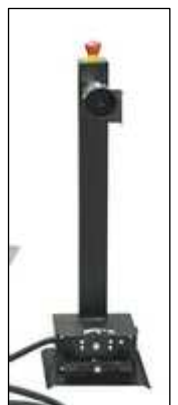

This comes with the machine



<b>Technical Data</b>	
Clamping Range	13"-27"
Max. wheel weight	1500 kg
Max. wheel diameter	1600 mm
Max. wheel width	780 mm
Clamping on central hole	105 – 700 mm
Hydraulic pump motor	1,1 kw 230/400 v-3PH
Gearbox motor	1,3 – 1,8 kw 230/4000 v-3PH
Operating pressure	0 - 130 bar
Bead breaker force inside-outside	1865 kg
Noise level in working condition	< 70 db
Net weight	560 kg

### Dimensions

