

megamount 913XL Racing SUPER-AUTOMATIC

"Double bead breaker for effective work. Space saving, absolute stable design with parallel mounting arm. Brilliant, easy going handling. This machine is strong enough for every existing car tire."

Designed to handle the toughest low profile/alloy rim combinations and run flat tyres, easy to use but solid and rigid like no other machine.



MAIN FEATURES

- PAR-MOVE: Pneumatic supported parallel movement of the mounting arm
- DOUBLE BEAD BREAKER: Smart Blade and Double Roller: Use roller for RunFlat /LowProfile, the shovel for all others.
- LEVER/NoLEVER pneumatic mounting and demounting kit.
- CENTER POST: clamping with Smart Lock. Rim touching only in the middle. Double speed.
- BP1 PLUS: bead pressing arm with "home" function
- Air Control Box: Inflating pressure limiting device (3,5bar) with oiler and water separator, Automatic rollup of inflating tube.
- Reinforced Chassis: extremely robust and stiff, granting increased rigidity and eliminating all flexes.
- Big Toolbox.
- Clamping range 12-30 inches

MADE IN  Designed, manufactured and assembled in ITALY




With option wheel lift.



Center Post

The new way to fix tires on the machine This ensures even, consistent clamping throughout the life of the machine, with a lot of accessories (Option) to clamp regular and reverse.

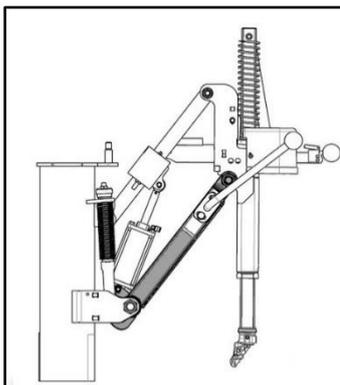

Par Move concept (Parallel Move)

Extrem rigid system replacing the mounting columns. Automatic offset after locking. Robust fixed vertical tower with innovative parallelogram operating arm (PAR-MOVE Concept). No back tilting column.

Smart Lock

Smart Lock, a fast wheel clamping system. Just slide the Smart Lock shaft into the wheel's center hole and into the clamping chuck and lift the knob. Less than 2 seconds to have a perfect rim clamping. Fast and reliable, the "expanding nut" can be easily calibrated.



Double bead breaker system

- Dual bead breaker system with air operated double arm/disk and bead breaker shovel.
- Bead breaker disks are slightly but purposely misaligned with the rim center for a better and faster penetration and immediate bead loosening, Center Driven Concept .
- **SMART BLADE** - Patented SBS System for bead breaker shovel travel memory. Adjustable bead breaker shovel angle.



megamount 913XL Racing SUPER-AUTOMATIC

Standard Features and Optional Accessories



Lever-No Lever tyre mounting/demounting system, can work either with or without a bead lifting lever, so you can decide which is the most effortless way to operate on specific tyre applications.



New air control box containing filter-lubricator unit has been mounted on the upper left side of the vertical tower. Inflating hose rewinds automatically. Operation and maintenance are quick and easy.



BP1 Plus pneumatic bead pressing arm. Lifts up automatically at the end of the mounting procedure, and moves back in rest position, with no need for the operator to change his working position (standard).

This is coming with the machine:



Optional Accessories



JetBlast

Option: This device helps seat the bead of stubborn sidewalls when inflating. Fully integrated in the machine. Replaces the GT device.


Wheel Lifter Option: because it is fully integrated in the machine please order the lift together with the machine. Enables the operator to easily raise the wheel up to the center post by a foot-operated pedal device. The lift can be retrofitted to the machine.



Color Options

WDK-KIT

to provide full WDK compatibility.

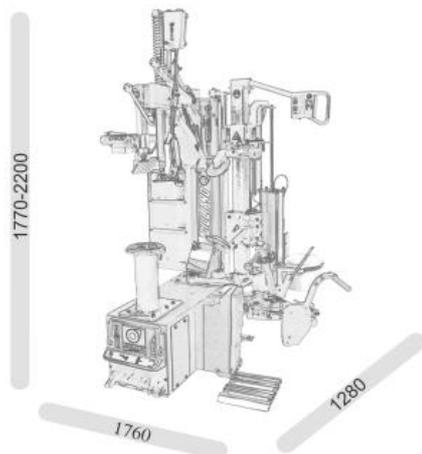

TECHNICAL DATA	
Air pressure	8 to 12 bar
Motor single phase	220V 1Ph / 50Hz /750W
2 speed rotation	7/16 rpm
Clamping range	12" to 30"
Maximal wheel diameter	1200mm
Maximal rim width	16" (406 mm)
Bead breaker pressure	3140kg
Bead breaker double disk	1200kg
Inflating pressure	3.5 bar
Dimensions, (packed - W x D x H)	113x138x186 cm
Gross weight (packed)	455kg