



megamount 70F / 70

AUTOMATIC TYRE CHANGER
WITH LOCKING CAPACITY
UP TO 27" AND
MOTOINVERTER



megamount 70F



megamount



Latest generation of Hofmann Megaplan Tyre Changers, designed and manufactured in Italy allows the operator to work easily on all types of wheel. With an emphasis on build quality and ergonomics, key features such as intelligently designed turntable, removeable pedal box, and super-duty fully-automatic operation can be enjoyed as standard across all models.

megamount

Reinforced base vertical post structure and 60x60 mm horizontal arm grant maximum rigidity. Simultaneous vertical and horizontal arm locking system, vertical arm with spring return

LL
KIT

ON REQUEST: Also available with Leverless mounting/demounting kit, featuring an adjustable position to suit all wheel types (must be ordered with the machine)

megamount 70






Locking capacity up to 27"

The heavy-duty (14mm) turntable has a locking capacity from 12" to 27" and utilises a direct clamping system, operated by 75 mm diameter cylinders, ensuring optimal clamping on all types of rim. The shape of the turnplate is designed so as to ease the bead-breaking of the second bead.

ON REQUEST:

Turntable with FLEX adjustable clamping system (increased clamping capacity 10" ÷ 27")

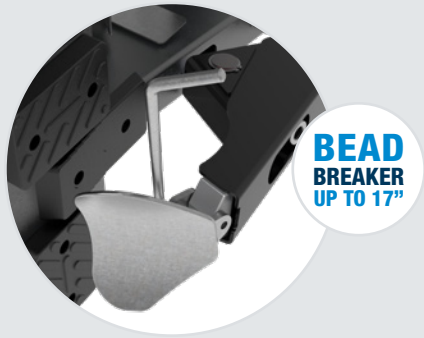

Bead breaker up to 17"

Ergonomic bead breaker with adjustable arm system which enables to operate on large wheels from 2" up to 17" width.

Motoinverter

Motor controlled by Motoinverter system with progressive variation of speed from 0 to 16 rpm. The inverter board is installed on the machine, away from the engine to overcome vibration and heat problems. Low power consumption at rest with the intelligent stand-by. High reliability and protection, with automatic alarm reset bringing the pedal to the resting position (no power outages required).




Pedal operated inflating device

Pedal-operated inflating system, manometer and CE-certified inflation pressure limiter.



HELPING DEVICE SYSTEMS

To make the *Megamount 70* even more functional, it is possible to choose the configuration of the following arms according to the real needs. *Megamount 70F* is equipped with the HPX-ADVANCE + HELPER ARM assist systems as standard.

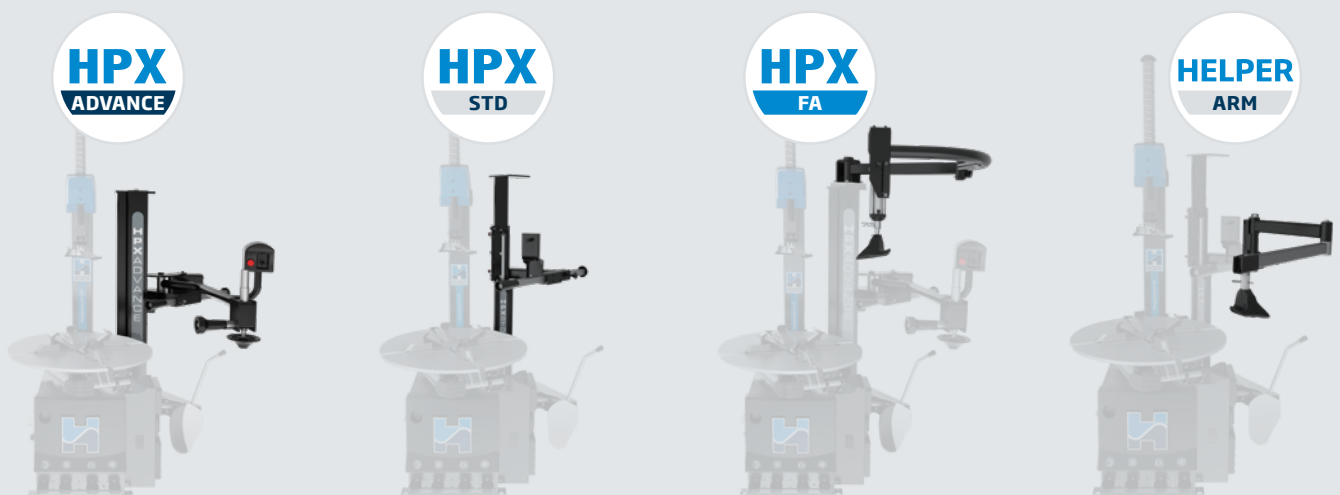

HPX-ADVANCE

HPX-STD

HPX-FA

HELPER ARM

Standard accessories



Bead lever



4 jaws ALU protection kit (only for MM70F)



Tool-holder



Rim protection (only for MM70F)



Plastic lever protection (only for MM70F)



Bead breaker blade protection (only for MM70F)

Optional accessories



Wheel lift



External inflating kit



Run Flat clamp



Jaws for motorcycle wheels 14" ÷ 24"



Jaws for scooter wheels 8" ÷ 14"



Bead-presser with pulling system



Electronic tyre inflator max. 4.5 bar



Front head protection (x2)



Rear head protection (x2)

Versions on request

LL Kit Version: Leverless mounting/demounting kit .
Adjustable operating position to suit all wheel types


TI Version: with an effective inflation device for bead seating integrated in clamping jaws

FLEX adjustable clamping system version: turntable with adjustable jaws (capacity 10"-27") in replacement of the standard turntable (capacity 12" - 27")

A Version: with pneumatic positioning of tool arm

3-Phase motor version: 0.75 kW 400V 50/60 Hz (2 speed) - 8-16 rpm

Single speed version: 110V/60Hz/1ph

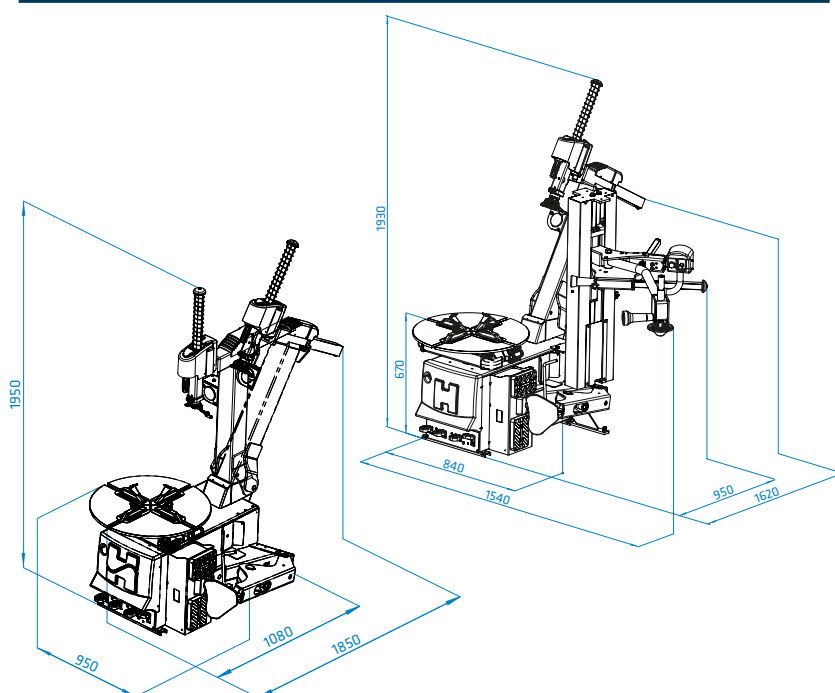

Technical Data

Clamping capacity	12" ÷ 27" (min ÷ max)
Internal clamping	14" - 27"
External clamping	12" - 24"
Max wheel diameter	1170 mm (46")
Max wheel width	435 mm (17")
Bead breaker force	15000 N
1-Phase motor	1.5 kW (Inverter) 230V 50-60Hz
Turntable speed	0 - 16 rpm (1ph - Inverter)
Operating pressure	8 - 10 bar (116 - 145 psi)
Noise level	< 70 ± 3 dB (A)
Net weight	270 kg



HOFMANN MEGAPLAN GmbH
Hüttenstrasse 7 - 67550 Worms - Germany
T +49 (0)6242 913 6666
hm-mail@hofmann-megaplan.com
www.hofmann-megaplan.com